

CHNT**NXC-06M~100**

Mounting Instructions
Paigaldusjuhised
инструкции за монтаж
Instrukcja montażu
Montageanleitung
Инструкция по монтажу
instructions de montage
asennus-ja käyttöohjeet
instruções de montagem
Monteringsveiledning
Montážní návod
Istruzioni di montaggio

instrucciones de montaje
Щодо монтування
Montaj Talimatları
Οδηγίες Εγκατάστασης
Instrucțiuni de montare
Monteringsanvisning
Montage instructies
Monteringsvejledning
Istruzzjonijiet ta ' muntagġ
Szerelési utasítás
Montāžas instrukcijas
Montavimo instrukcijos



Caution: Installation by electricians only

Ettevaatust: paigaldus elektrikud ainult

Внимание: инсталиране от електротехницисамо

Uwaga: Instalacja tylko przez wykwalifikowany personel

Vorsicht: Installation nur durch den Elektriker

Предупреждение: монтаж должен выполняться только квалифицированным электротехническим персоналом

ATTENTION : l'Installation par du personnel qualifié seulement

Varoitus: asennus sallittu vain sähköalan ammattilaiselle

Atenção: instalação pelos eletricistas somente

Advarsel: monteres kun av elektrikere

Varování: Montáž pouze osobou s elektrotech. kvalifikací

Attenzione: installazione solo da parte di personale addestrato

PRECAUCIÓN: instalación por electricistas sólo

Увага: монтаж електрики тільки

Dikkat : Kurulum sadece elektrikçiler tarafınca yapılmalıdır.

Προσοχή: εγκατάσταση να γίνεται από ηλεκτρολόγους μόνο

ATENȚIONARE: instalarea de electricieni numai

Varning: Monteras av behörig elektriker

Let op: installatie door electriciens alleen

Advarsel: monteres kun af elektrikere

Attenzjoni: installazzjoni mill-elettriciști biss

Figyelmeztetés: a telepítés a villanyszerelő csak

Piesardzīgi: iekārtas, elektrīkiem, tikai

Įspėjimas: montavimą privalo atlikti elektrikai

NXC-06M~100

Contactor

Kontaktor

Контактор

Stycznik

Schütz

Контакторы

Contacteur

Kontaktori

Contator

Kontaktor

Stykač

Contattore

Contactor

Контактор

Kontaktör

Τηλεχειριζόμενοι διακόπτες αέρα (στ Ρελέ ισχύος)

Contactori

Kontaktor

Relais


Kontaktor

Contactor

Kontaktor

Kontaktors

Kontaktorius



NXC


1

Installation
Paigaldamine
Инсталляция
Instalacja
Installation
Установка

Installation
Asennus
Instalação
Installasjon
Instalace
Installazione

Instalación
Встановлення
Kurulum
Εγκατάσταση
Instalare
Installation



Installatie
Installation
Installazzjoni
Telepítés
Uzstādīšana
Montavimas

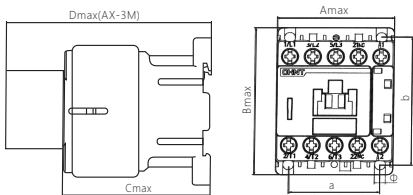

NXC-06M~16M

(mm)



Model	Overall dimensions				Installation dimensions		
	Amax	Bmax	Cmax	Dmax	a	b	Φ
NXC-06M~16M	45.5	59	58	94	35±0.35	50±0.48	4.2
NXC-06M/4~16M/4	45.5	59	58	94	35±0.35	50±0.48	4.2
NXC-06M/Z~16M/Z	45.5	59	70	106	35±0.35	50±0.48	4.2
NXC-06M/4/Z~16M/4/Z	45.5	59	70	106	35±0.35	50±0.48	4.2





NXC-06M/N~16M/ N

(mm)

Model	Overall dimensions				Installation dimensions		
	Amax	Bmax	Cmax	Dmax	a	b	Φ
NXC-06M/N~16M/N	91	64	58	94	80±0.7	50±0.48	4.2
NXC-06M/4/N~16M/4/N	91	64	58	94	80±0.7	50±0.48	4.2
NXC-06M/Z/N~16M/Z/N	91	64	70	106	80±0.7	50±0.48	4.2
NXC-06M/4/Z/N~16M/4/Z/N	91	64	70	106	80±0.7	50±0.48	4.2









NXC-06~38

(mm)

Model	Overall dimensions							Installation dimensions		
	Amax	Bmax	Cmax	Dmax	Emax	Fmax	Gmax	a	b	Φ
NXC-06~16	45.5	75	88	70	126.5	146.5	90	35±0.31	48±0.31	4.5
NXC-18~22	45.5	75	88	70	126.5	146.5	90	35±0.31	48±0.31	4.5
NXC-25~38	56.5	87	93	81	131.5	151.5	95	40±0.31	48±0.31	4.5









NXC-06/N~38/N

(mm)

Model	Overall dimensions					Installation dimensions		
	Amax	Bmax	Cmax	Emax	Fmax	a	b	Φ
NXC-06/N~16/N	106	75	88	126.5	146.5	95±0.31	48±0.31	4.5
NXC-18/N~22/N	106	75	88	126.5	146.5	95±0.31	48±0.31	4.5
NXC-25/N~38/N	126	87	93	131.5	151.5	111±0.31	48±0.31	4.5







NXC-40~100

(mm)

Model	Overall dimensions							Installation dimensions			
	Amax	Bmax	Cmax	Dmax	Emax	Fmax	Gmax	a1	a2	b	Φ
NXC-40~65	77	129	118	102	156.5	176.5	121	40±0.28	64±0.32	105±0.57	6.5
NXC-75~100	87	132	127	112	165.5	185.5	129	40±0.28	74±0.32	105±0.57	6.5







NXC-40/N~100/N

(mm)


Model	Overall dimensions					Installation dimensions			
	Amax	Bmax	Cmax	Emax	Fmax	a1	a2	b	Φ
NXC-40/N~65/N	169	129	118	156.5	176.5	131±0.72	155±0.8	105±0.57	6.5
NXC-75/N~100/N	189	132	127	165.5	185.5	141.5±0.72	175.5±0.8	105±0.57	6.5

35mm for NXC-06M-100(NXC-06M/N-100/N)


75mm for NXC-40-100(NXC-40/N-100/N)




NXC-06M~16M

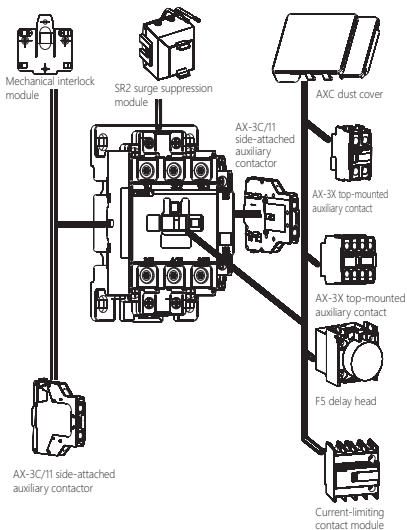

AX-3X/F5

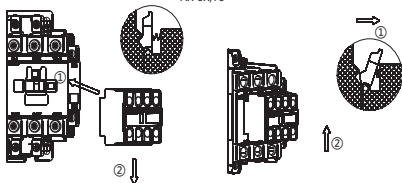

AX-3C/11



NXC-06~100

2

Debugging and operation

Silumine ja toimimine

Отстраняване на грешки и работа

Debugowanie i działanie

Debugging und Betrieb

Отладка и эксплуатация

Débugage et fonctionnement

Virheenkorjaus ja toiminta

Depuração e operação

Feilsøking og drift

Ladění a operace

Debug e funzionamento

Depuración y operación

Налагодження та експлуатація

Hata ayıklama ve işletme

Επεξεργασία σφαλμάτων και λειτουργία

Debugging și funcționare

Felsökning och drift

Foutopsporing en bewerking







Debugging og betjening

Debugging u thaddim



Hibakeresés és működés

Atklūdošana un darbība



Derinimas ir operacija

 mm ²	 mm ²	 mm ²	 mm ²	 mm ²	 mm ²
1~2.5	1~2.5	1~2.5	1~2.5	—	—

3P





4P



NXC-06M~16M

3P



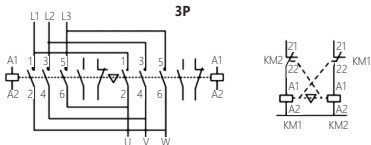

NXE-06~100

Main circuit	 NXE-06~22 M3.5 1.2Nm	 Slot type Philips	X	 mm ²	 mm ²	 mm ²	 mm ²	 mm ²	 mm ²	 A > 3.5mm, L < 7.8mm
	 NXE-25~38 M4.0 1.2Nm	 Slot type Philips	NXE-06~16	1~4	1~4	1~4	1~2.5	1~2.5	1~2.5	 A > 4.0mm, L < 8.0mm
			NXE-18~22	1.5~6	1.5~6	1.5~6	1.5~4	1.5~4	1.5~4	
Control circuit	 M3.5 M3.5 0.8Nm	 Slot type Philips	X	 mm ²	 mm ²	 mm ²	 mm ²	 mm ²	 mm ²	 A > 3.5mm, L < 8.0mm
			NXE-06~38	1~1.5	1~1.5	1~1.5	1~1.5	1~1.5	1~1.5	

Main circuit	 NXE-40~100 MB 6Nm (NXE-40~65) MB 9Nm (NXE-75~100)	 4mm	X	 mm ²	 mm ²	 mm ²	 mm ²	 mm ²	 mm ²	 A > 35mm, L < 8mm
			NXE-40~65	6~25	4~10	6~25	4~10	6~25	4~10	
			NXE-75~100	10~50	6~25	10~50	6~25	10~50	6~25	
Control circuit	 M3.5 1.2Nm	 Slot type Philips	X	 mm ²	 mm ²	 mm ²	 mm ²	 mm ²	 mm ²	 A > 35mm, L < 8mm
NXE-40~100	1~1.5	1~1.5	1~1.5	1~1.5	1~1.5	1~1.5				

NXE-06~100

Zhejiang Chint Electrics Co., Ltd.

NXC-06M~100

Add: No.1, CHINT Road, CHINT Industrial Zone, North Baixiang,
Yueqing, Zhejiang 325603, P.R.China

E-mail: global-sales@chint.com

Website: <http://en.chint.com>

